

Rope Sheaves and complete block assembly


滑輪組成滑車



Main dimensions and tech characteristics for sheaves:

滑輪主要規格與技術特點

Sheave main data 滑輪主要資料	Sheave A type A型滑輪	Sheave C type C型滑輪	Solid Sheave 固定滑輪
	Welded 1 plate 一處焊接	Welded 2 plates 二處焊接	Free of welding 無焊接
Outer diameter 外徑	Ø150 - Ø630	Ø530 - Ø1300	Ø150 - Ø1300
Inner diameter 內徑	Ø100 - Ø600	Ø500 - Ø1200	Ø100 - Ø1500
Welding 焊接	yes	yes	NO
Welded unions 焊接處	2	4	0
Gorge angle 谷角	45°	45°	customer request 客戶需求

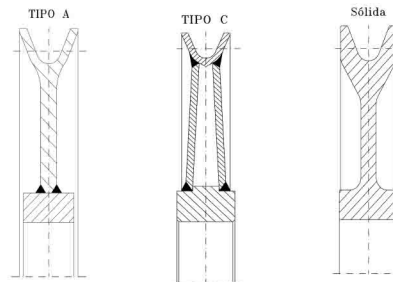

Cold Laminated
Tipo A

Welded+machined
Tipo C

Free-of-Welding
SOLID Sheave

To propose the right block we need at least these inputs::

SWL (ton)
Rope Diameter (mm)
Quantity of sheaves (u)
Application*



***Application:**
Steel /Cement Mills
Mega-Constructions
Marine
Oil & Gas
Offshore Works
Nuclear
Hydro Electric
Shipyards

應用：鋼鐵/水泥廠，大型建築，船艦，石油與天然氣離岸工廠，核能、水力、電力船廠。

We firmly recommend to fully machine and assemble it at manufacturers site in order to carry out load tests to get entire full guarantee



為了全然保固進行載重測試，我們強烈建議在製造商處完全加工並聚集。



揮王企業股份有限公司
HWE WANG ENTERPRISES INC.

TEL: 07-8317878 FAX: 07-8311789, 07-8224967

E-mail: hwewang@ms3.hinet.net http://www.hwe-wang.com.tw